

# EFFECTS OF WEARING IMPERMEABLE AND PERMEABLE PROTECTIVE CLOTHING ON THERMOREGULATORY RESPONSES WHILE SEDENTARY

T.L. Endrusick and R.R. Gonzalez

U.S. Army Research Institute of Environmental Medicine  
Natick, MA 01760-5007 USA



## INTRODUCTION

The use of protective clothing as a barrier against occupational and environmental hazards has increased dramatically in recent years. Certain types of protective overgarments are also being utilized in cleanroom manufacturing environments where contamination of the work site by personnel is a major concern. In the computer semiconductor manufacturing business, there is a reported industry-wide perception that the sedentary nature of the work does not justify the wearing of more costly, "breathable" protective clothing versus inexpensive, disposable, non-permeable garments. It is understandable that some managers of large-scale, industrial protective clothing and equipment programs would purchase specific garments based solely on a minimal cost per unit basis. Nevertheless, a recent study suggests that the use of higher-cost, vapor-permeable, and reusable protective clothing can actually be more economical when analyzed on a cost per use basis (1). The purpose of this present study was to investigate if protective overgarments manufactured from the same basic materials but with different levels of permeability would have an influence on thermoregulatory responses in volunteers who were sedentary and exposed to two typical indoor workplace environments.

## MATERIALS AND METHODS

Eight healthy males (age =  $21.0 \pm 1.9$  years, height =  $173.3 \pm 5.6$  cm, weight =  $72.5 \pm 6.3$  kg, body surface area =  $1.86 \pm 0.10$  m<sup>2</sup>) volunteered for the study. They were informed of the purpose, procedures and risks of the study. All volunteers expressed an understanding of the study by signing a statement of informed consent. All test overgarments were manufactured from material containing a waterproof/breathable, protective membrane. The material was made by W.L. Gore and Associates. The protective membrane was composed of a thin layer of microporous polytetrafluoroethylene (PTFE). The PTFE membrane can be manufactured with varying levels of permeability. The test overgarment materials were evaluated by the manufacturer for permeability according to ASTM Standard E96-80 (2), which is used to calculate a moisture vapor transmission rate (MVTR, g·m<sup>-2</sup>·24 h<sup>-1</sup>). All volunteers wore both an impermeable overgarment (IO, MVTR = 5) and a permeable overgarment (PO, MVTR = 864) during a 4-h sedentary exposure to two different environments: 18.3°C/50% relative

humidity (**RH**) (**COOL**); 29.7°C/52% RH (**WARM**). There was a constant air velocity of 1.1 m·s<sup>-1</sup> directed at the volunteers as they sat in the climatic chamber. All volunteers also wore lightweight 100% polyester underwear, gloves, socks and leather boots. Mean weighted skin temperature (T<sub>sk</sub>, 8 sites, °C), rectal temperature (T<sub>re</sub>, °C), skin wettedness (w, %) calculated from dew point sensors attached underneath the overgarment and heart rates (HR, bpm) were measured. Total body mass loss ( $\dot{m}_b$ , g·h<sup>-1</sup>) and moisture absorption (g) by the various garments were determined by pre- and post-experiment weights of all clothing items (Sauter balance, precision ± 0.01g). Subjects read or filled out various questionnaires during the time period. Repeated measures analysis of variance were applied to mean data for all variables and pair-wise comparisons were treated for significance using Tukey's test of critical differences.

## RESULTS


Table 1 shows mean initial and final values of T<sub>sk</sub> and T<sub>re</sub> when wearing the IO and PO during **COOL** and **WARM**. During **COOL**, final values of T<sub>sk</sub> and T<sub>re</sub> were consistently lower than initial values in both the IO and PO. Some volunteers were observed to be shivering during their last hour of **COOL** exposure. This indicates that a complete protective clothing ensemble with insufficient thermal insulation could cause mild thermal discomfort in sedentary workers in cooler work environments. During **WARM**, final T<sub>sk</sub> and T<sub>re</sub> values were generally higher than initial values, especially when wearing the IO where the final T<sub>sk</sub> value was elevated 7% above initial value.

**Table 1.** Initial and final values (Mean ± 1 SD) of T<sub>sk</sub> and T<sub>re</sub> of volunteers (n = 8) when wearing the IO and PO during **COOL** and **WARM**.

<u>GARMENT</u>		<u>COOL</u>	<u>WARM</u>
IO	Initial T <sub>sk</sub>	29.5 ± 1.0	30.8 ± 1.6
	Final T <sub>sk</sub>	27.8 ± 0.9	32.9 ± 1.5
	Initial T <sub>re</sub>	36.9 ± 0.2	37.0 ± 0.3
	Final T <sub>re</sub>	36.5 ± 0.5	37.2 ± 0.2
PO	Initial T <sub>sk</sub>	29.2 ± 1.3	30.7 ± 1.3
	Final T <sub>sk</sub>	27.7 ± 0.7	32.1 ± 1.3
	Initial T <sub>re</sub>	36.9 ± 0.3	37.0 ± 0.3
	Final T <sub>re</sub>	36.3 ± 0.7	36.9 ± 0.3

\*Values shown are Means ± 1 SD

Fig. 1 shows  $w$  of the volunteers while wearing both overgarments during COOL and WARM. There were significant increases in  $w$  during both environmental conditions when wearing the IO ( $P < 0.05$ ). At 4-h exposure,  $w$  approached 0.9 when wearing the IO during WARM. Excessive  $w$  has been shown to translate with warm discomfort as the respective skin site becomes wet with sweat. Translated to the whole body surface  $w$  has been shown to be a good indicator of thermal strain as rate of body heat storage increases (3,4).

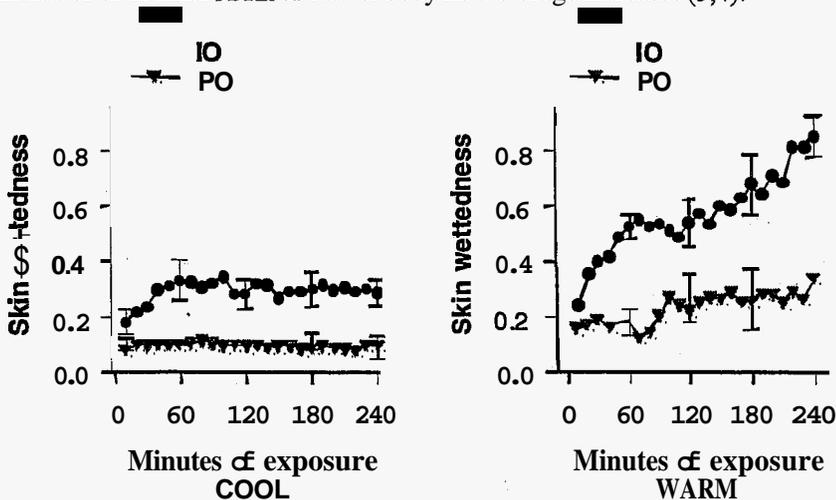

**Figure 1.** Local skin wettedness (Mean  $\pm$  1 SD) of volunteers ( $n = 8$ ) while wearing the IO and PO during COOL and WARM as a function of time of exposure.

Although there were no significant differences in HR when wearing either overgarment, HR during WARM was elevated an average of 24% and 19% above COOL values with the IO and PO, respectively. Mean  $\dot{m}_b$  was lower ( $P < 0.05$ ) during COOL runs (IO = 77.5, PO = 78.5) compared with the WARM runs (IO = 92.3, PO = 103). The IO had the highest mean weight increase ( $P < 0.01$ ) (11 g, COOL and 44 g, WARM) due to absorption and/or condensation of nonevaporated moisture vapor within the overgarment during the 4-h test. Absorption of moisture vapor also caused higher mean underclothing/footwear weight increases (22 g, COOL and 43 g, WARM) when worn with the IO. These weight increases were lower (20 g, COOL and 13 g, WARM) when wearing the PO.

## CONCLUSIONS

These results showed that a moisture-vapor-permeable overgarment reduced overall thermal strain, reduced underclothing absorption of sweat and increased evaporation of moisture vapor when compared with a non-permeable

overgarment during an extended sedentary exposure to simulated workplace environments. Cleanroom personnel can be required to wear completely encapsulating protective clothing ensembles for up to 12 h during an extended work shift. The use of protective clothing ensembles with sufficient thermal resistance and increased levels of moisture vapor transmission lowers the w built up underneath such garments and may improve overall thermal comfort that could lead to subsequent improvements in task performance and workforce morale.

## **DISCLAIMER**

The views, opinions and/or findings contained in this paper are those of the authors and should not be construed as an official Department of the Army position, policy or decision unless so designated by other official documentation. Citation of commercial organizations and registered trade names of products in this paper do not constitute an official Department of the Army endorsement or approval of the products or services of the organization. Approved for public release; distribution is unlimited.

## **REFERENCES**

1. Schwope, A.D. and Renard, E.P. **1992**, Estimation of the cost of using chemical protective clothing, in J.P. McBriarty and N.W. Henry (eds.), *Performance of Protective Clothing: Fourth Volume*, ASTM STP 1133 (American Society of Testing and Materials, Philadelphia), **972-981**.
2. American Society for Testing and Materials **1984**, *Standard Test Methods for Water Vapor Transmission of Materials, Standard Test Method E96-80*. Philadelphia, PA.
3. Gagge, A.P. and Gonzalez, R.R. **1974**, Physiological and physical factors associated with warm discomfort in sedentary man, *Environmental Research*, **7**,230-242.
4. Gonzalez, R.R. **1988**, Biophysics of heat transfer and clothing considerations, in K.B. Pandolf, M.N. Sawka and R.R. Gonzalez (eds.), *Human Performance Physiology and Environmental Medicine at Terrestrial Extremes*. (IN: Benchmark Press, Inc.), **45-94**.